


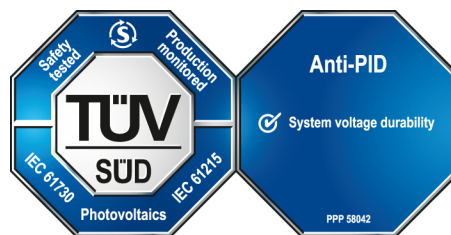

Product Service

CERTIFICATE

No. Z2 0833340025 Rev. 06

Holder of Certificate: Tenka Solar GmbHLinprunstr. 49
80335 München
GERMANY**Certification Mark:****Product:****Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704061905901-05**Valid until:** 2026-10-24**Date,** 2021-10-25

(Zhulin Zhang)



CERTIFICATE

No. Z2 0833340025 Rev. 06

Model(s):

TKA-XXXM-72, xxx= 330 to 390 in step of 5
 TKA-XXXM-60, xxx= 275 to 325 in step of 5
 TKA-XXXM-54, xxx= 245 to 290 in step of 5
 TKA-XXXM-48, xxx= 220 to 260 in step of 5
 TKA-XXXM-24, xxx= 110 to 130 in step of 5
 TKA-XXXM-144, xxx= 370 to 415 in step of 5
 TKA-XXXM-120, xxx= 305 to 345 in step of 5
 TKA-XXXM-108, xxx= 275 to 315 in step of 5
 TKA-XXXM-96, xxx= 245 to 275 in step of 5
 TKA-XXXM-144, xxx= 420 to 460 in step of 5
 TKA-XXXM-120, xxx= 350 to 380 in step of 5
 TKA-XXXM-108, xxx= 315 to 345 in step of 5
 TKA-XXXM-96, xxx= 280 to 305 in step of 5
 TKA-XXXM-156, xxx = 565 to 595 in step of 5
 TKA-XXXM-144, xxx = 525 to 545 in step of 5
 TKA-XXXM-132, xxx = 480 to 500 in step of 5
 TKA-XXXM-120, xxx = 435 to 455 in step of 5
 TKA-XXXM-108, xxx = 395 to 410 in step of 5
 TKA-XXXM-96, xxx = 350 to 365 in step of 5
 xxx is standing for rated output power at STC

Parameters:

Construction:	Framed, with Junction box, Cable and Connectors.
Safety Class:	Class II
Maximum System Voltage:	1000 V DC or 1500 V DC
Fire Safety Class:	Class C
PID Test Condition:	-1500V DC, 96h, 85% RH, 85°C
PID testing method is according to IEC TS 62804-1:2015	

Tested according to:

IEC 61215-1:2016
 IEC 61215-1-1:2016
 IEC 61215-2:2016
 IEC 61730-1:2016
 IEC 61730-2:2016
 PPP 58042B:2015